




SMD LED Ultrathin Advertising Led Display Screen Digital Board For Outdoor

Our Product Introduction

Basic Information

- Brand Name: YEOAN
- Model Number: YLD series
- Minimum Order Quantity: 50
- Packaging Details: different according to the sizes
- Delivery Time: 30days
- Payment Terms: L/C, T/T

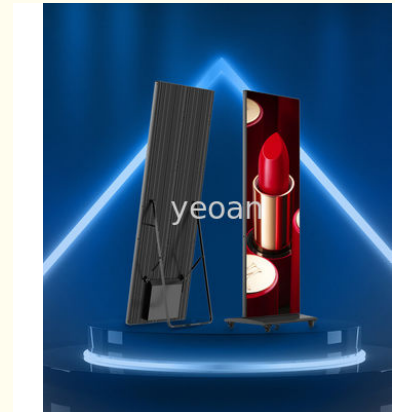

Product Specification

- Screen Material: Led Board
- Size: Customized Size
- Viewing Angle: 160°
- Best View Distance: 4-47m
- Life Span: 100000hours
- Operating Life: >460000hours
- Leds: SMD 3in1
- Operation Temperature: -20 ~70
- Color Processing: 16.7million
- Usage: Outdoor And Indoor
- Contrast Ratio: 8000:1
- Refresh Freq.(Hz): 3840
- Highlight: **SMD LED advertising led display screen,
Ultrathin advertising led display screen,
SMD LED outdoor digital advertising board**

for more products please visit us on projector-hd.com

Product Description

Description:

LED mirror screen, also known as "poster screen", is evolved from advertising machine and also belongs to small pitch LED display screen. A subdivided LED advertising mirror screen is controlled by terminal software, network information transmission and multimedia terminal display to form a complete advertising broadcast control system, and uses pictures, text, video, small plug-ins and other multimedia materials for advertising.

160 ° ultra wide viewing angle, multi angle viewing without reflection or color deviation, attracting customer attention from multiple angles;
3840Hz high Refreshing, wide color gamut, restoring original colors, stunning picture quality, eye-catching and even more attractive.

Light and easy to move and place, flexibly applied to various scenes such as exhibition centers, shops, stations, shopping centers, etc

Specifications:

ModelNo.:	LT-Poster1.5	LT-Poster1.8	LT-Poster1.5	LT-Poster1.8	LT-Poster2.0	LT-Poster2.5
Pixel density(mm)	1.5	1.8	1.5	1.8	2	2.5
LEDtype	SMD	SMD	SMD	SMD	SMD	SMD
display size(WXH)(mm)	600×1687.5	600×2025	640×1920	640x1920	640×1920	640×1920
display resolution(WXH)(pixel)	384×1080	320×1080	416x1248	344x1032	320x960	256×768
weight(kg)	57/34	61/38	71/42			
housing material			AL.			
angle(H/M)	160°/160°					
refresh freq.(Hz)	3840					
contrast ratio	8000:1					
Brightness(nits)		600				500
Voltage(M)	AC100~240					
Average power consumption(W/m2)	120	125	120	125	115	105
Max.Power consumptionW/m2)	480	500	480	500	460	420
operating system	Android					
Video interface	Videointerface:HDMI*2(1in1out),USB3.0*1;Audiointerface:ExternalAudiointerface; Controlinterface:R)45,WIFI,localAPnetwork,4Gnetwork(optional); Sensorinterface(connectedto brightness,temperatureandhumiditysensors)					
maintenance way	fron(screen)/rear(controlcase)					
IP class	frontIP30/rearIP60					





Hefei Yeoman Information And Technology Co.,Ltd.



+8613866663080



zero@yeoman.com



projector-hd.com

No. 79 Kexue Avenue, Keyuan Pioneer Center, High-tech Zone, Hefei City, Anhui Province.